

6

5

4


3

2


1

REVISION RECORD			
LTR	ECO NO	APPROVED	DATE


LDO 3.3V

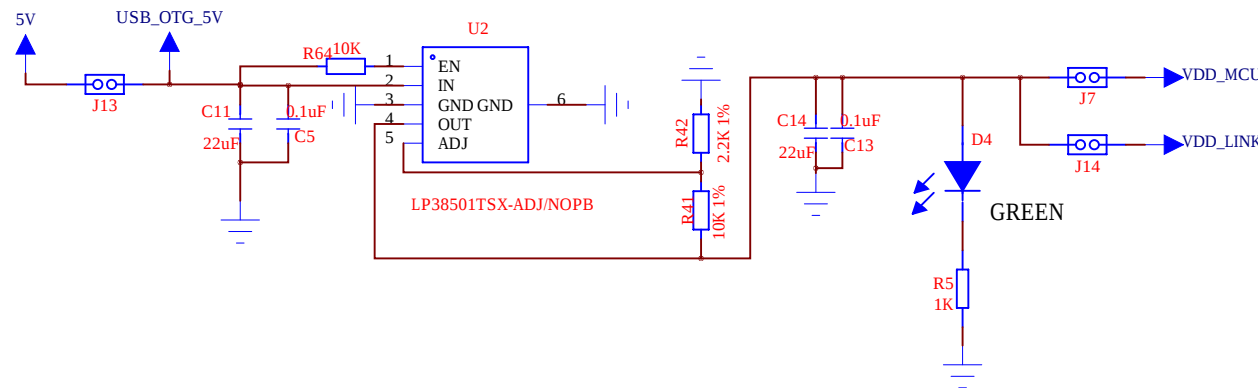


LDO 0.9V

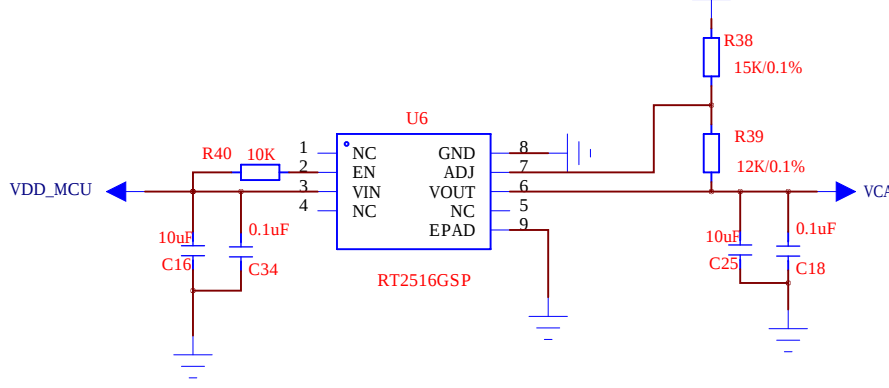


MCU WAKEUP

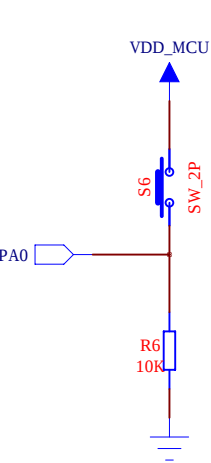


RESET

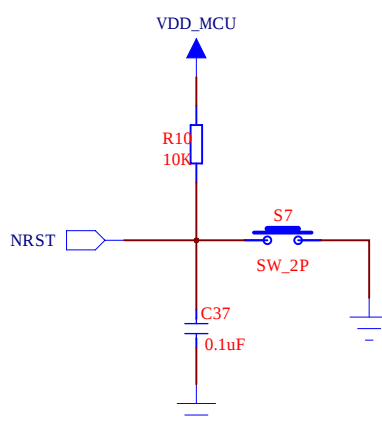


KEY

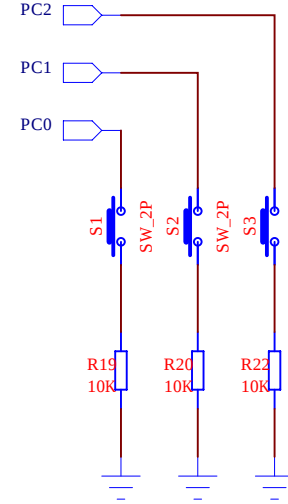

LED

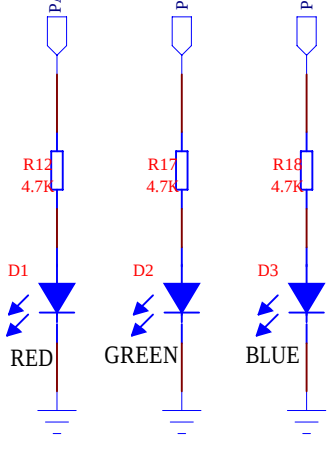


USB1 OTG

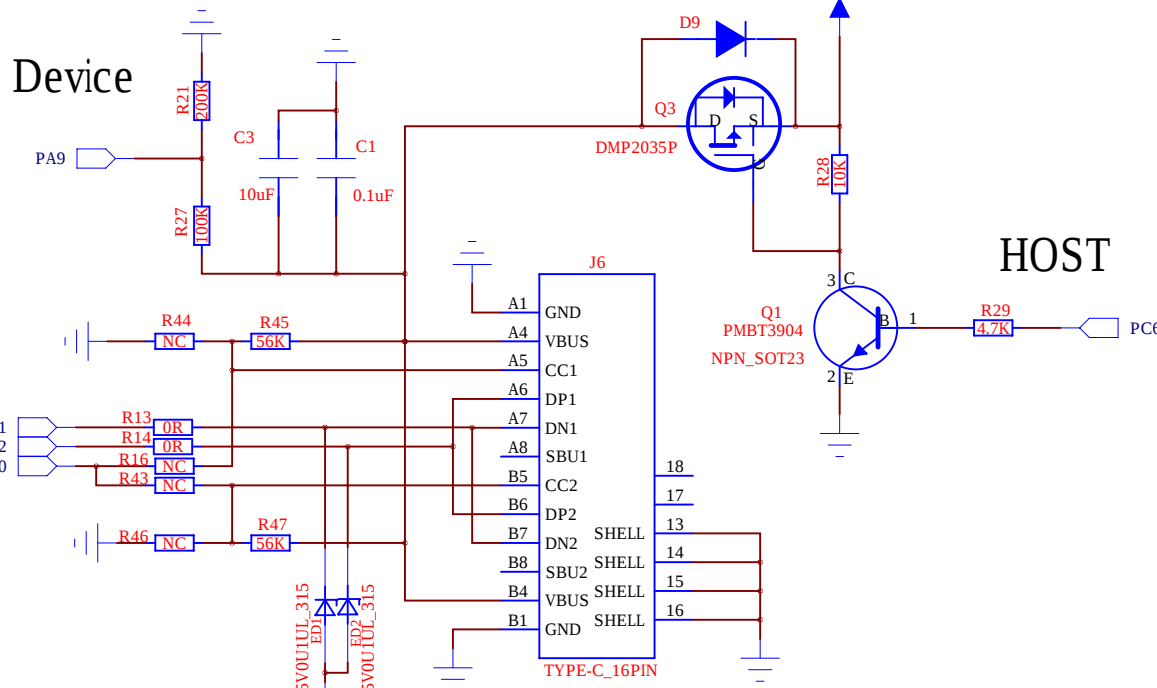


NS-LINK


MCU

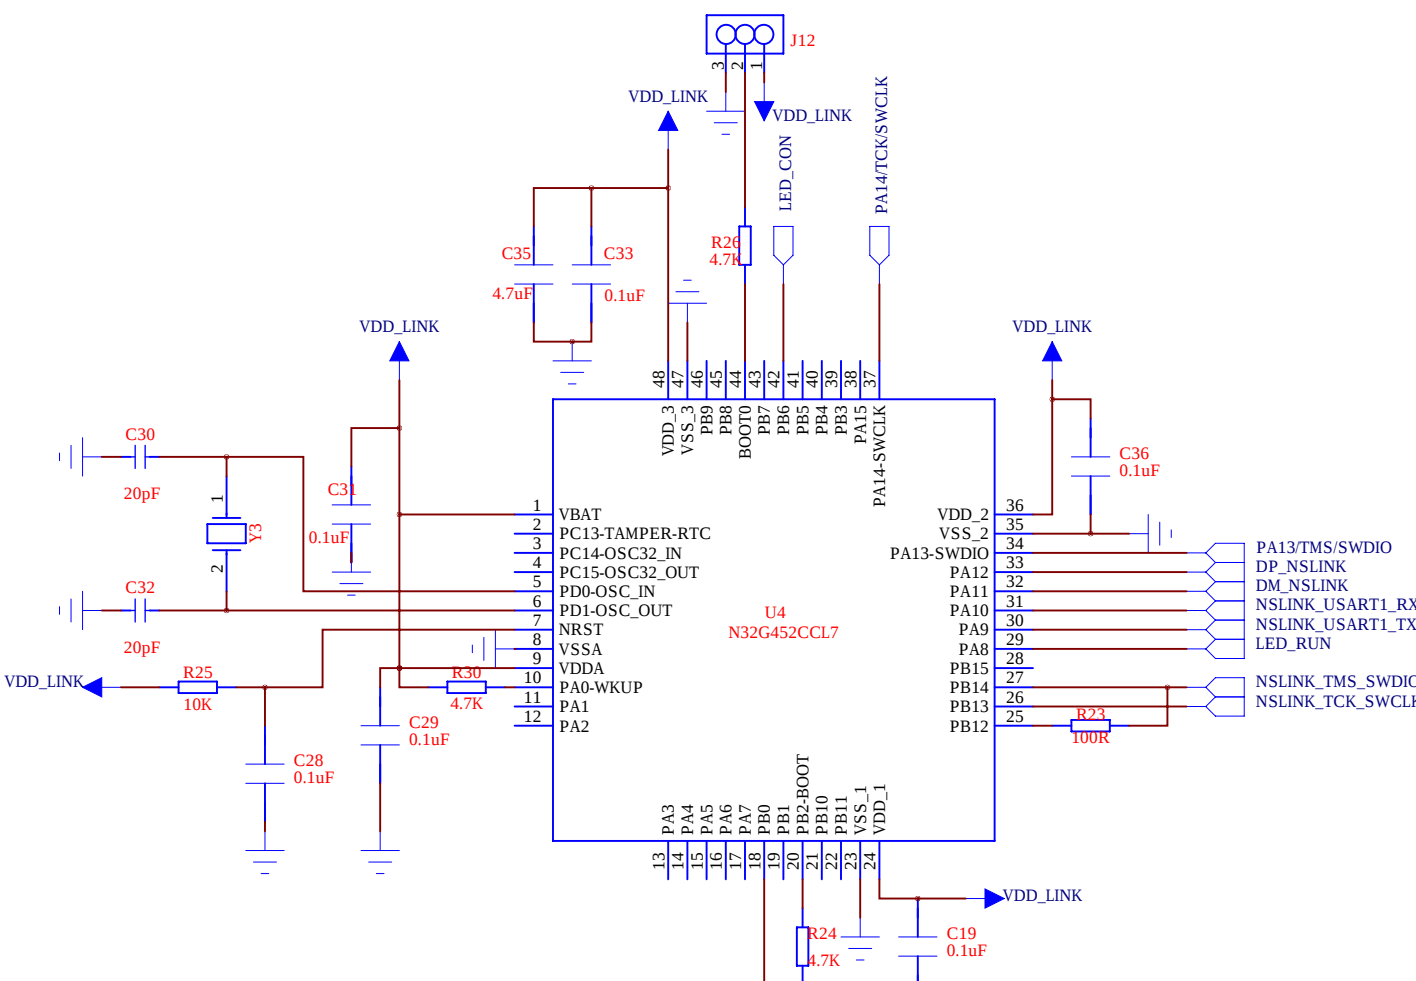


DEBUG USB

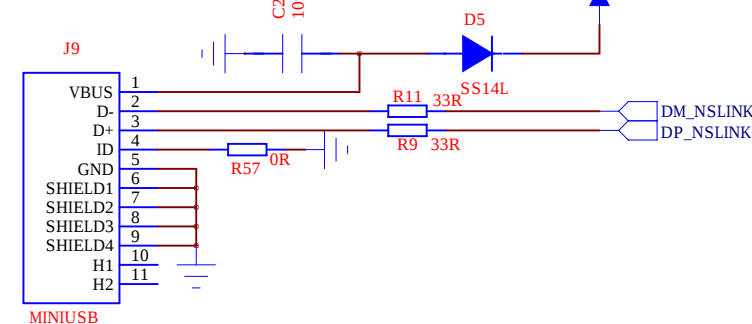


HEADER

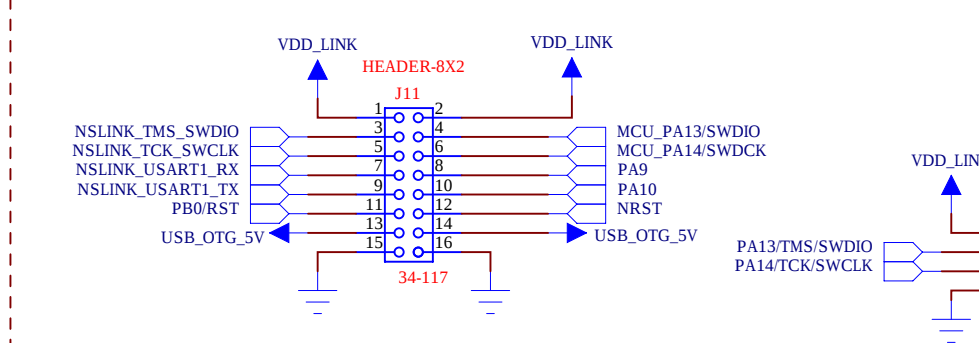

LED

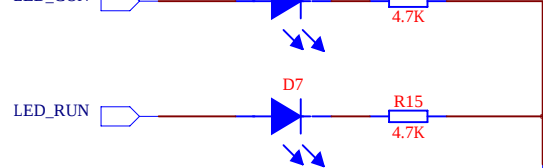

TP_GND





COMPANY: NationS

TITLE: N32H785XIB7EC_STB

DRAWN:	DATED:	CODE:	SIZE:	DRAWING NO:	REV:
CHECKED:	DATED:	A1	1	1	1.5
QUALITY CONTROL:	DATED:	SCALE:	SHEET: 2		
RELEASED:	DATED:				

REVISION RECORD			
LTR	ECO NO.	APPROVED	DATE

MCU

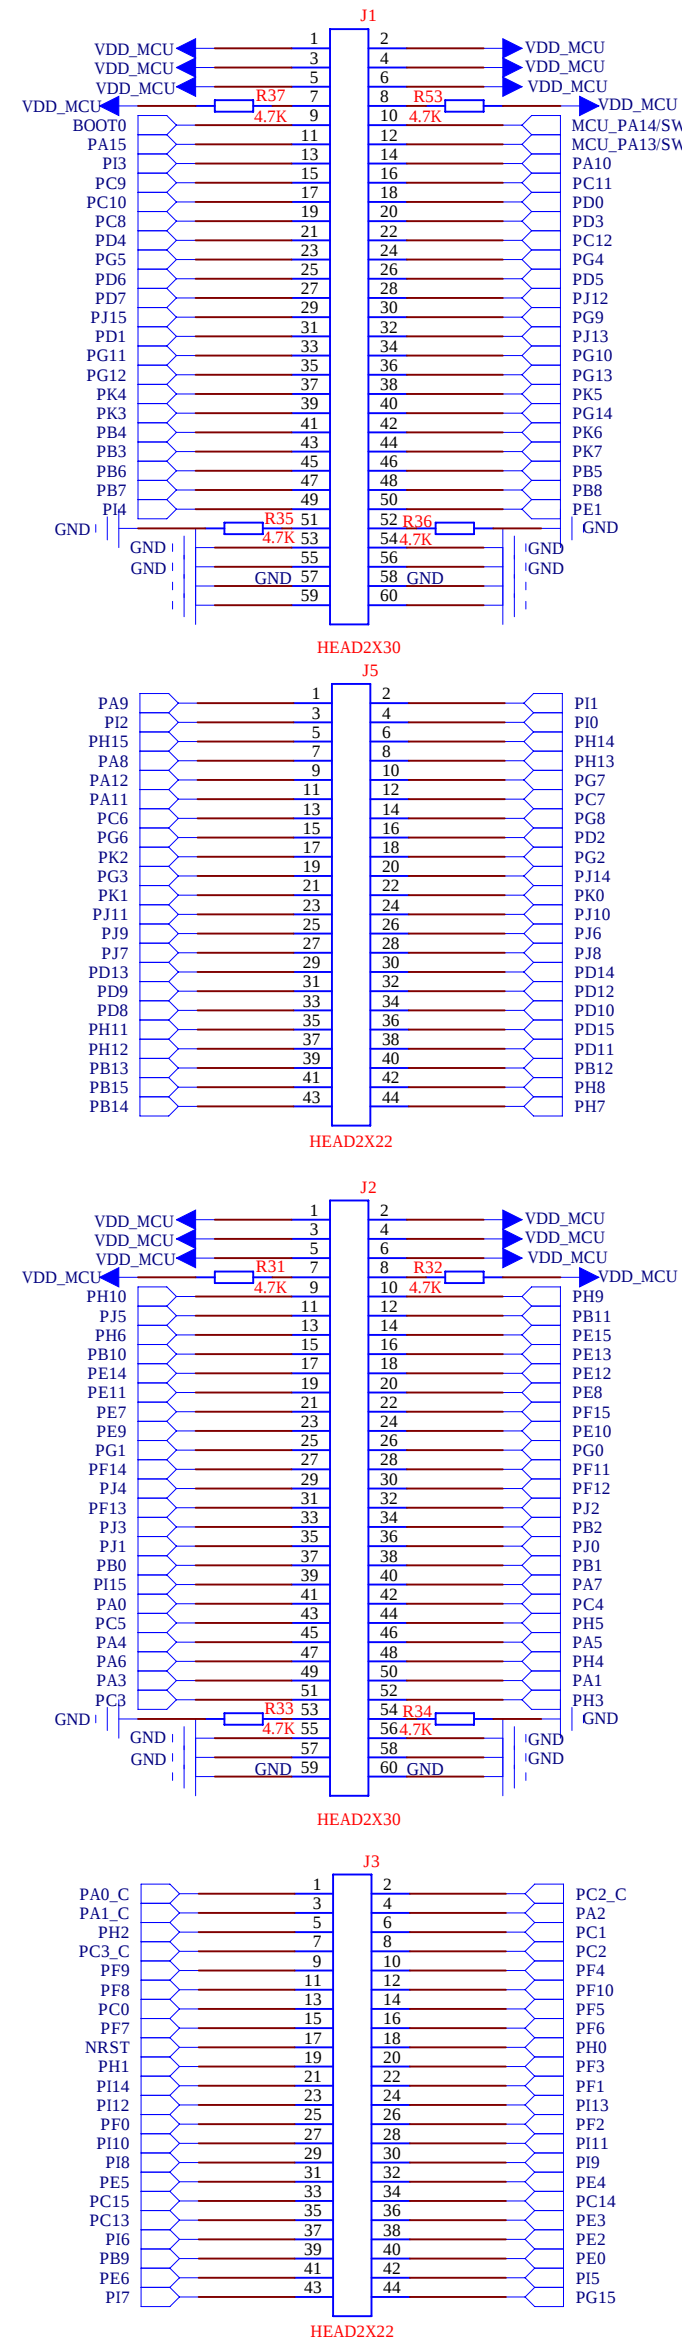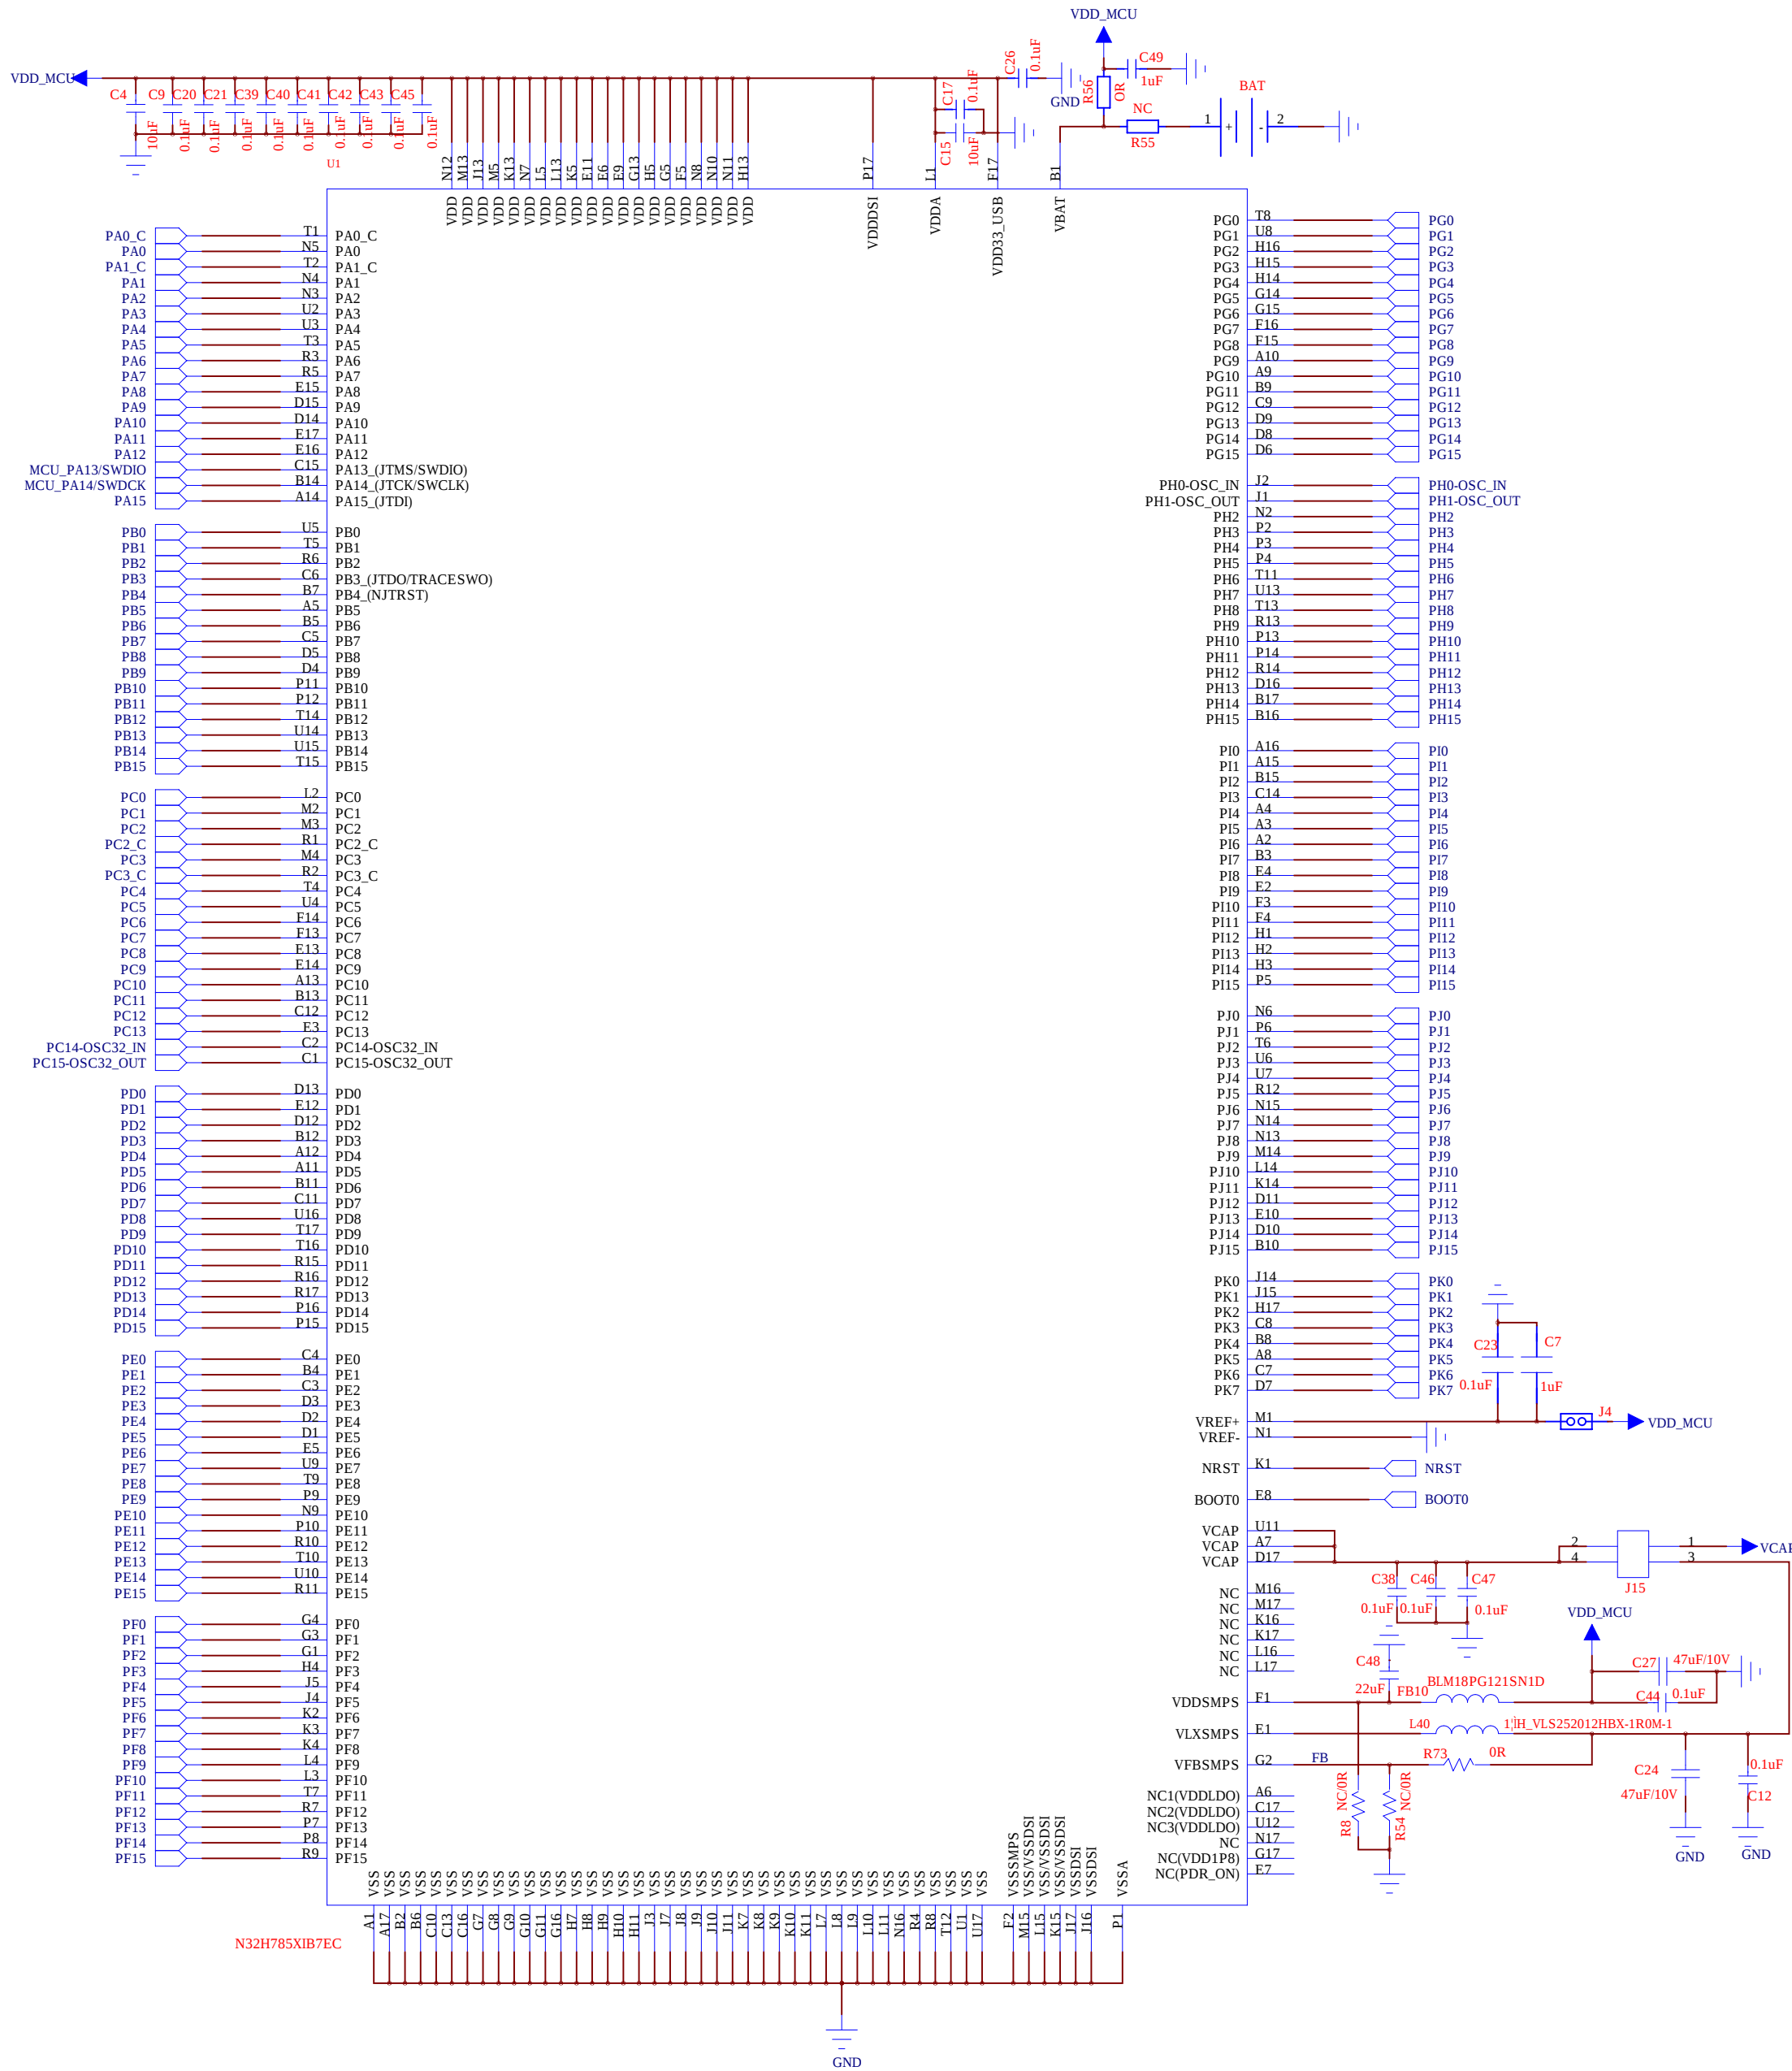

VCAP 供电选择	所需跳线说明	贴片器件说明
内部DCDC供电	J15插针3和4引脚需连接	需贴片器件：FB10、L40、R73、C12、C24、C27、C44、C48、C38、C46、C47 不需贴片器件：R8、R54
外部LDO供电	J15插针1和2引脚需连接	需贴片器件：R8、R54、C38、C46、C47 不需贴片器件：FB10、L40、R73、C12、C24、C27、C44、C48

COMPANY: NationS			
TITLE: N32H785XIB7EC_STB			
DRAWN:	DATED:	CODE:	SIZE:
CHECKED:	DATED:	DRAWING NO:	REV:
QUALITY CONTROL:	DATED:	SCALE:	SHEET: 2
RELEASED:	DATED:	SCALE:	SHEET: 2

DRAWN:	DATED:
CHECKED:	DATED:
QUALITY CONTROL:	DATED:
RELEASED:	DATED:

CODE:	SIZE:	DRAWING NO:	REV:
A1	1	1.5	1.5